



“Aru ED 50 PROF EX” is an outward opening insulated external door with a 50 mm timber sash and a profile blanking. The design is suitable for use in renovated buildings, country houses and cottages. Using this method the customer can achieve a bespoke design.

Painted or stained external doors with profile blanking.



An external double door.



The top of the profile blanking is covered with a timber



A stained external door made of



A stained external door made of knotted pine

Aru ED 50 PROF EX



Aru ED 50 PROF EX

CE
ISO 9001:2008

OUTWARD OPENING PROFILE BLANKING EXTERNAL DOOR

Doorleaf	thickness 50 mm
Finishing	with water-based paint or stain
Frame	92x42 mm
Threshold	42 mm oak
Glazing	double or triple glazingpanel 23 mm
Gasket	in the frame
Hinges	2D adjustable, 3 pcs
Panelling	profiled blanking on both sides (fixed with screws)
Lock	according to the customer's wishes (Assa, Abloy, KfV, etc.)

Outside dimensions according to the customer's wishes

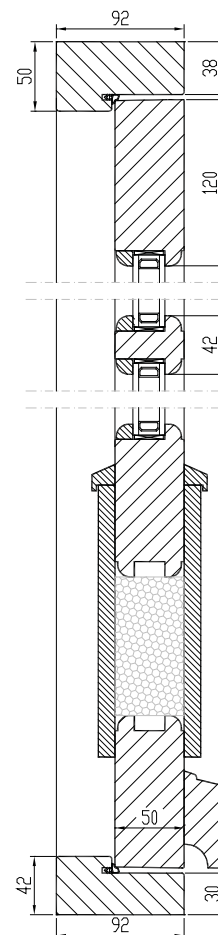

MODELS:

