ARU Joinery
Hulja, Kadrina vald, 45203 Lääne-Virumaa, Estonia Tel: +372 329 5650 Fax: +372 329 5651
info@arugrupp.ee
www.arujoinery.com

AruAL NORDIC patio LINE 92 IN

Inward opening tilt&slide alu-clad window/door

- Jamb width 104,5 mm (with aluminium cover)
- Sash thickness 104,5 mm (with aluminium cover)
- Timber selection:
  - fingerjointed, knotted or selected laminated pine timber;
  - laminated oak timber
- Timber finishing with waterbased paint or stain. Paint according to RAL color chart, stain according to manufacturer's samples
- Aluminium cladding - powder coated. Paint according to RAL color chart
- Triple glazing, thickness 52 mm (Ug>0,47W/m²K)
- Product U-value <0,82W/m²K
- Glazing with glazing beads inside, sealing from inside and outside with silicone
- Glazing bar options:
  - penetrating glazing bars (1)
  - Vienna glazing bars(Norwegian style) (2)
  - glued-on decorative bars (Georgian style)(3)
  - decorative bars inside the glass unit (4)

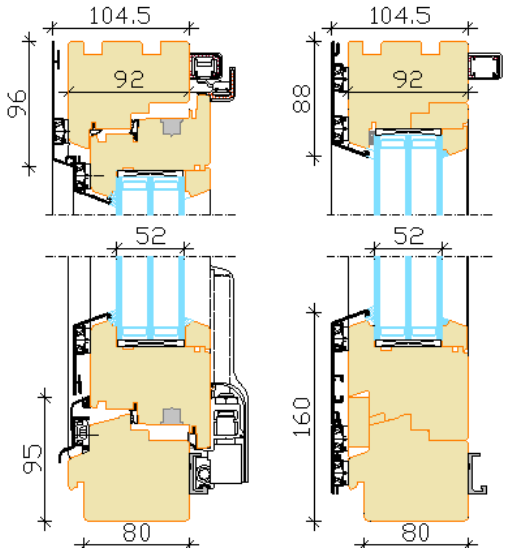

Sliding part Fixed part

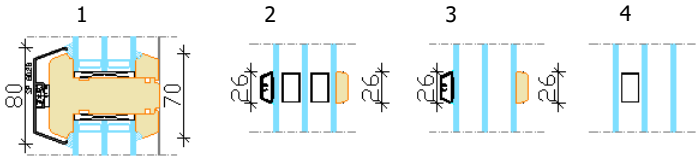

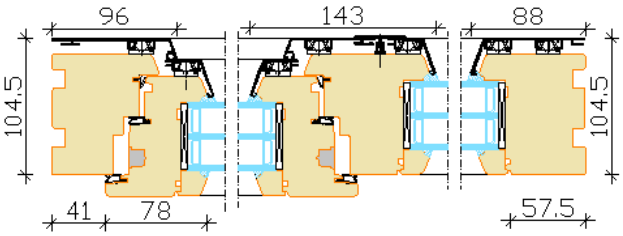

- Extras:
  - special glasses (toughened, laminated, sun protection, self cleaning, pattern, etc.),
  - blinds inside the glass unit,
  - different materials and different colors of edge mouldings,
  - lockable handles, design handles,
  - safety fittings,
  - jamb extensions

- Hardware options:
  - **standard** tilt and slide
    max weight of sash 160 kg
    Width of sash 650—1680 mm
    Height of sash 840—2500 mm

  - **handle-controlled** tilt and slide
    max weight of sash 200 kg
    Width of sash 760—2030 mm
    Height of sash 940—2700 m

Various combinations with opening and non-opening parts

Inside view

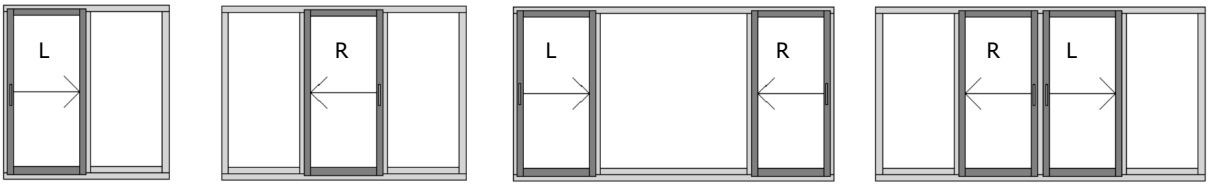

1 sliding sash Left or Right | 1 sliding sash Left or Right | 2 sliding sashes Left and Right | 2 sliding sashes With fixed centre post Right and Left

NB! Minimum maximum dimensions and opening options also depend on the height and width ratio of the window and other factors. More information from our specialists.