



AruAL ED S-60 Nordwin Classic EX AruAL ED S-60 Nordwin Modern EX

Outwards opening Scandinavian type wooden-aluminium external doors

- Made to Measure Sizes
- Frame 115x44 mm + aluminium cover
- Door sill: 25 mm aluminium or 25 mm combi or 44 mm hard wood
- Sash profile thickness 60 mm + aluminium cover
- Gasket around the sash
- Timber selection:
 - frame from laminated pine or oak timber;
 - threshold from oak timber;
 - door leaf from laminated pine or oak timber
- Timber finishing with waterbased paint or stain.
Paint according to RAL colour chart,
stain according to manufacturer's samples.
- Aluminium finishing: RAL aluminium colour card
- Double glazing, thickness 26 mm
- Glazing is sealed with internal and external gasket
- Glazing bar options:
 1. penetrating bars
 2. glued on both sides of the glass+slats inside the glazing (Norwegian style)
 3. glued on both sides of the glass (Georgian style)
 4. decorative bars inside the glazing

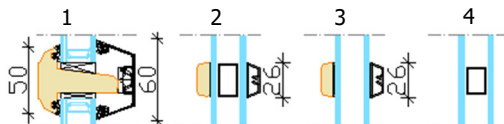

- Crossbars 115 mm
- Panels:
 - outside: flat aluminium sheet
 - inside:
 - flat insulated panel
 - insulated, profiled panel (vertical/diagonal/herringbone)
 - raised/moulded panel




- 2D adjustable hinges
- Assa 1- or 3-point Lockcase
- Extras:
 - jamb extensions, grooves for jamb extension;
 - special glasses (toughened, laminated, sun protection, self cleaning, pattern etc), various glass spacers
- Combinations with fixed parts


Wooden Sash profiles:

Classic


Modern




Standard jamb




Jamb with Groove



Jamb with extension


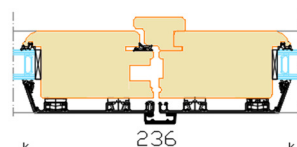


Middle part of double door

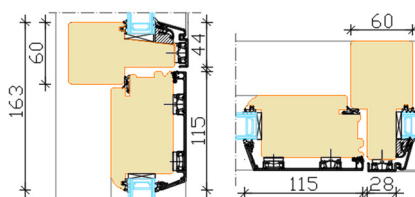


Transom


Mullion

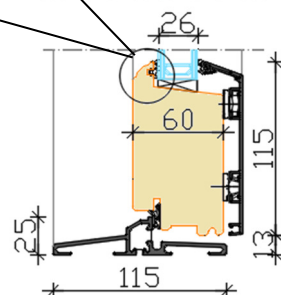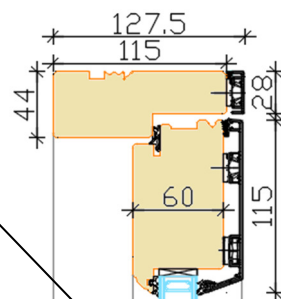

Aluminium door sill

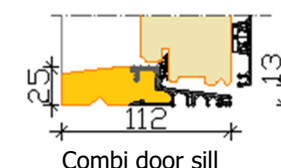

Combi door sill

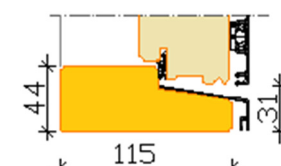

Hardwood door sill

OPENING
Views from outside



Single door

The width of the single door is 820...1160 mm



Double door

The width of the active part is 790...1130 mm
The width of the passive part is 390...1130 mm.

Door height is 1751...2400 mm.